

when communication is **critical**

FEATURES

- Network access panel for explosive atmospheres
- Ex mb ib e IIC T4 Gb
- DSP for acoustic signal processing
- IP networking and power over Flowire technology
- Six programmable buttons with individual labels and status indicators
- Optional button protection covers
- Indicators for power, call and fault
- For single or dual systems (A and B systems)

DESCRIPTION

The EAPFX-6 is a rugged call panel, developed for harsh offshore environments and hazardous areas. The antistatic plastic housing withstands corrosion from the most common corrosive gasses and compounds found in this type of environment. The access panel features six fully programmable buttons, which can be used to manually initiate fire alarms, gas alarms or any other action in the Exigo system.

The access panel is equipped with indicators to show the status of the power supply, call activity and whether a fault is present in the system. The access panel's buttons features two independent status indicators each, which shows the status of the related button's function.



The access panel is fully digital, and connects to the Exigo system over a single-pair cable. The access panel is fully monitored to ensure detection of any fault which may compromise the system's functionality.



ORDER NUMBER	TYPE	DESCRIPTION	SHIP WEIGHT
1023221516	EAPFX-6	Exigo Industrial Ex Access Panel, 6 Buttons, Flowire	3,4 kg
Accessories			
1023533511	EMMAX-1H	Exigo Handheld Industrial Ex Microphone, 1 Button, IP66	0,2 kg
AK5850HS		A-Kabel Twincom Headband Headseth ATEX	0,4 kg
1008140225	TAX-2B	Ex-Approved Cable for Headset with PTT Button	0,4 kg
1008150030	TAX-3	Ex-Approved Handset with PTT, unterminated	0,3 kg
2990102120		Powerbox PSU, 24V DC, 120W Flowire EX 120	1,2 kg
2990102240		Powerbox PSU, 24V DC, 250W Flowire EX 250	1,2 kg

EAPFX-6 TECHNICAL SPECIFICATION

MECHANICAL	
Dimensions (HxWxD):	346 x 178 x 101 mm
Weight:	3,4 kg
Mounting:	On-wall
Color:	Black
Cable entry:	Flowire: 2 x Cable glands for 7-20 mm cable Microphone: 1 x Cable gland for 5-10 mm cable I/O: 1 x Cable gland for 7-20 mm cable
ENVIRONMENTAL	
Operating temperature:	-40°C to +60 °C
Operating humidity:	10% to 95% (non-condensing)
Storage temperature:	-40°C to +70°C
Storage humidity:	10% to 95% (non-condensing)
IP rating:	IP-66
IK rating:	7J @-20°C
ELECTRICAL	
Nominal voltage:	$V_{NOM} = 18 \text{ VDC}$ $V_{MIN} = 5 \text{ VDC}$ $V_{MAX} = 24 \text{ VDC}$
Power consumption:	$P_{NOM} \leq 3 \text{ W (idle)}$ $P_{MAX} = 8 \text{ W}$
NETWORK	
Flowire	2 x Power line communication
CERTIFICATIONS	
Immunity:	EN 60945, EN 50130-4, EN 61000-6-1, EN 61000-6-2, EN 55103-2, FCC-47 part 15B
Emissions:	EN 60945, EN 50130-4, EN 61000-6-3, EN 61000-6-4, EN 55103-1, FCC-47 part 15B
Safety:	IEC60079
Ex Class:	Ex II 2G Ex ib mb e IIC T4

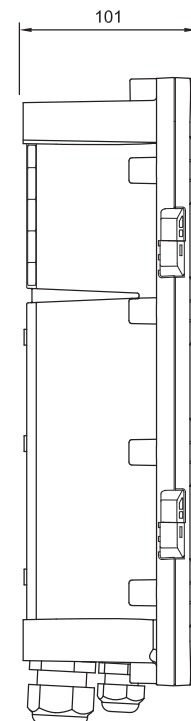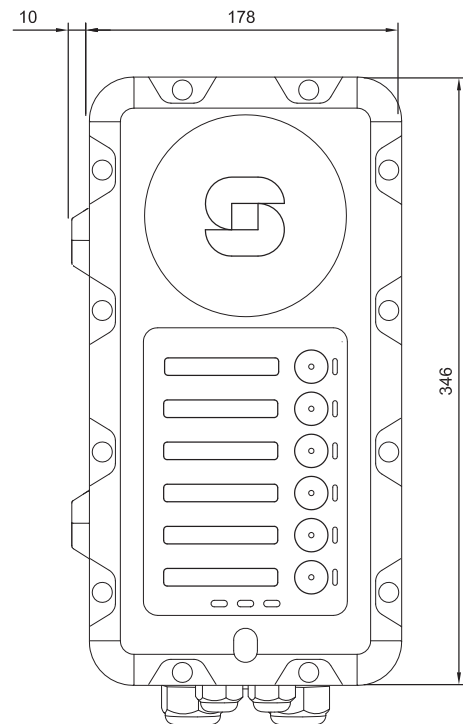

ORDER NUMBER

1023221516

DOC NO

A100K11396

11.06.2014

sales@vingtor.com
sales@stentofon.com



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. STENTOFON and VINGTOR products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.