

TELEINDUSTRIA srl

Phone:..... (39) 2 45713729


Fax:..... (39) 2 45714000

E-mail:..... sales@teleindustria.it

Web-site:..... www.teleindustria.com



Tutta la viteria è in acciaio INOX

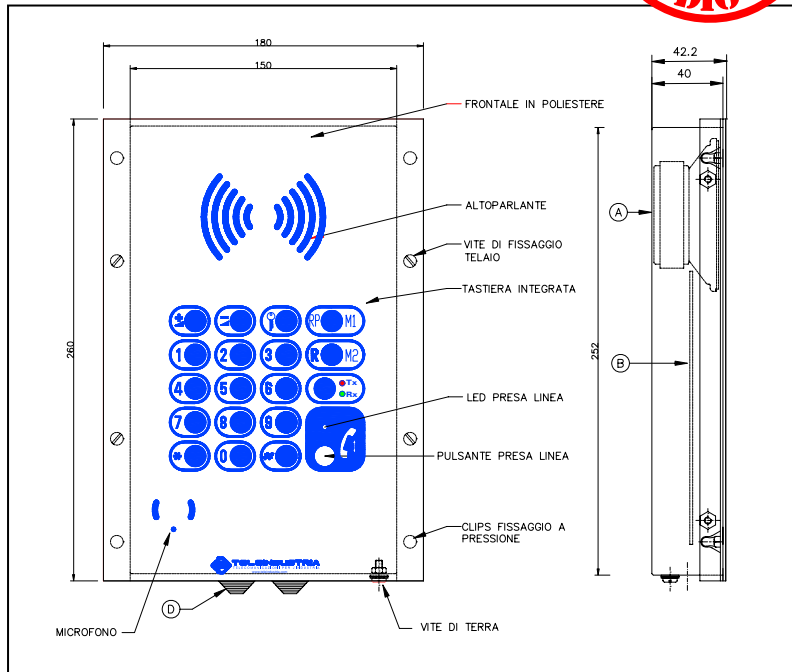

Full-Duplex & Push-To-Talk Clean Room Telephone  
Suitable for flush or wall mounting  
**P/N TLS250T**

**Electrical Characteristics:**

Powered by the telephone line  
 Ringing voltage: 35 ÷ 90 Veff  
 Dialing: DTMF  
 Flashing/earth: adjustable  
 Electronic Bell: 85 - 90dB at 1 m.  
 Autoreply: programmable on 1 to 90 rings  
 Hook: automatic hook  
 Microphone circuit: anti-noise

**Operating functions:**

Keypad: 0 .. 9, \*, #, Last nr. redial, flash  
 Memories: M1 – M2  
 Volume: adjustable by keypad  
 Programming: 100% from remote via tiph line

**Additional functions**

- Full-Duplex and Push to Talk (PTT) mode, for a high quality conversation up to 95dB noise ambient
- Booster amplifier 12Vdc
- Keys-entry authorization mode (by password)
- Local relay for door opening
- Local fault detection, with audio test, compatible with remote diagnostic software TelDia®

Body/Material:.....stainless-steel INOX/microban©  
 Flush-mounting frame: .....galvanized painted steel  
 Loudspeaker/microphone: .....vandal resistant  
 Mounting:.....on wall  
 Termination:.....Inside screw connections  
 Dimensions: .....180 x 260 x 42 mm  
 Weight:.....2,0 kg  
 IP-rating (\*):.....65  
 Max. / min. amb. Temp:.....-20 °C / + 60°C  
 Cables inlets:.....(2 cable inlets for cable φ 5 – 8 mm)  
 Opening: .....4 clips

**Maintenance:**

all circuits and control devices are fixed on the easy removable front plate for a very quick substitution of equipment in field.



**Installation, Operation and Maintenance Procedures**

- Open the front panel, fix the flush frame in the panel accordingly to the instructions of the operator's book
- Pass the cables through the cable inlets being sure that the cable fit with the rubber gasket
- Connect the telephone wires at the screw terminals as indicated in the operator's book
- Make a functional test calling another extension and asking to be re-called
- Close the front panel accordingly to the instructions of the operator's book

This equipment is supplied with a 2 year warranty against defective workmanship

